

# Model 2VT469

## 3-Phase Voltage Transformer

### Frequency

60 Hz.

### Standard Secondary Voltage

120 Volts

### Insulation Level

600 Volt, 10 kV BIL full wave.

### Accuracy Class

+ 1% at all burdens up to 5 VA at 1.0 and 0.95 P.F.

### Thermal Rating: (Per Phase)

40 VA at 30°C. amb., 27 VA at 55°C. amb.

Terminals are No. 6-32 screws with one lockwasher and one flatwasher.

Approximate weight 4.5 lbs.



Clear Plastic Cover

#### REGULATORY AGENCY APPROVALS




Manufactured to meet the requirements of ANSI/IEEE C57.13.  
Classified by U.L. in accordance with IEC 44-1

### Model 2VT469

Catalog Number	Voltage Ratio	Turns Ratio	Rec. Primary Fuse Rating
2VT469-069	69.3:120	0.58:1	1.5
2VT469-120	120:120	1:1	1.0
2VT469-208	208:120	1.73:1	0.5
2VT469-240	240:120	2:1	0.5
2VT469-277	277:120	2.31:1	0.5
2VT469-288	288:120	2.4:1	0.4
2VT469-300	300:120	2.5:1	0.4
2VT469-346	346:120	2.88:1	0.4
*2VT469-480	*480:120	4:1	0.25
*2VT469-600	*600:120	5:1	0.25




## Model 2VT469

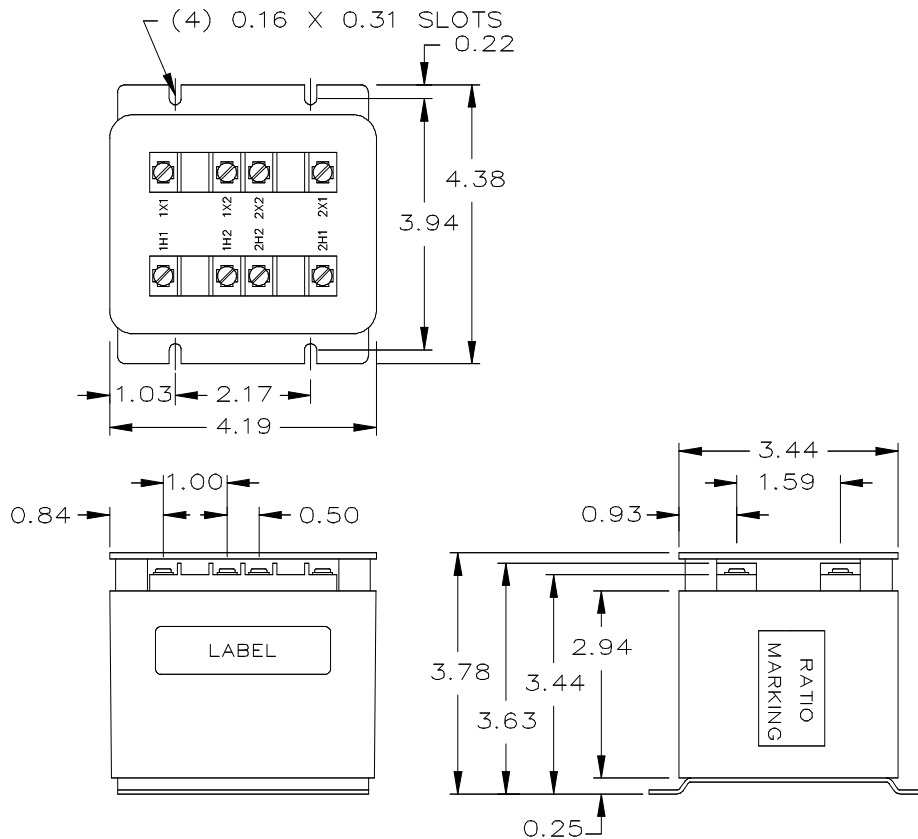

## Characteristics

- The core and coil assembly is encased in a thermoplastic shell and filled with resin.  
These transformers are designed for operation line-to-line. They may also be operated line-to-ground or line-to-neutral at reduced voltage, (58% of rated volts). It is desirable to use a 0.40 amp fuse in the secondary to protect the transformer.
- With two exceptions these transformer are ANSI C57.13 group 1. Those marked \* are group 2.
- Models designed specifically for 50 Hz operation are available with reduced performance. Please consult factory for details.
- Model 2VT469 is an assembly of two transformers in one case with all terminals accessible, for open delta connection.
- Each transformer has a clear plastic cover.

## Connection Diagram

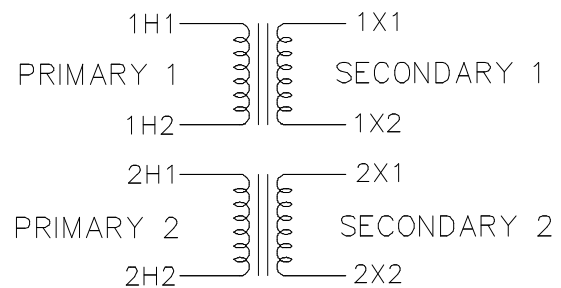

## GEGridSolutions.com

ITL\_Model\_2VT469-Flyer-EN-2017-11-Grid-AIS-1567. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

### Worldwide Contact Center

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

