

Models 3P27 & 3P28

Current Transformers
Window Sizes 1.44"x 0.44", 1.56"x 0.82"

Application

3 phase relaying and motor overload protection.

Frequency

50-400 Hz

Insulation level

600 Volts, 10 kV BIL full wave.


Continuous Thermal Current Rating Factor

1.33 at 30°C. ambient.

1.0 at 55°C. ambient.

Leads are UL 1015, 105°C CSA approved, No. 16 AWG, 24" long.

Approximate weight 2 lbs.

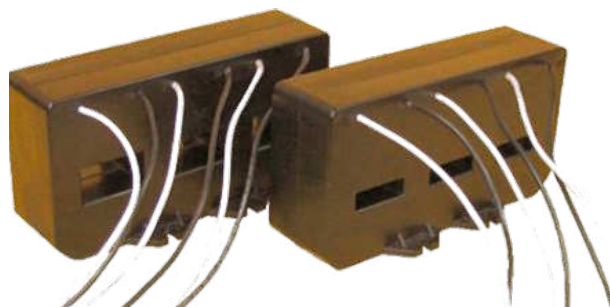

REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13. Classified by U.L. in accordance with IEC 44-1






Data Table: Models 3P27 & 3P28

Catalog Number	Current Ratio	VA FOR ± 1% Class	Secondary Winding Resistance (Ω @ 75 °C)
3P27-201	200:5	3.0	0.040
3P27-251	250:5	5.0	0.048
3P27-301	300:5	7.5	0.057
3P27-401	400:5	10.0	0.079
3P27-501	500:5	15.0	0.099
3P27-601	600:5	20.0	0.119

Catalog Number	Current Ratio	VA FOR ± 1% Class	Secondary Winding Resistance (Ω @ 75 °C)
3P28-401	400:5	10.0	0.072
3P28-501	500:5	15.0	0.090
3P28-601	600:5	20.0	0.108
3P28-901	900:5	25.0	0.150



Models 3P27 & 3P28

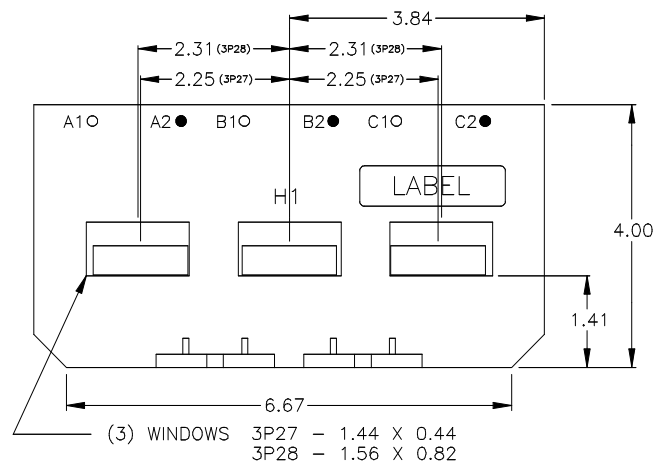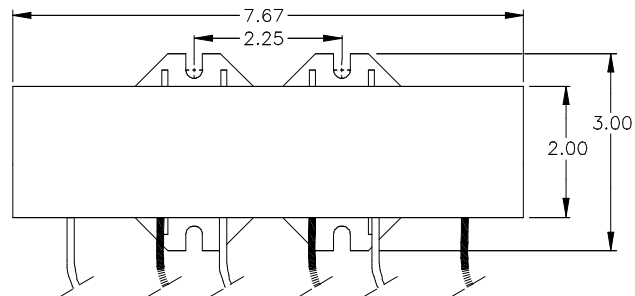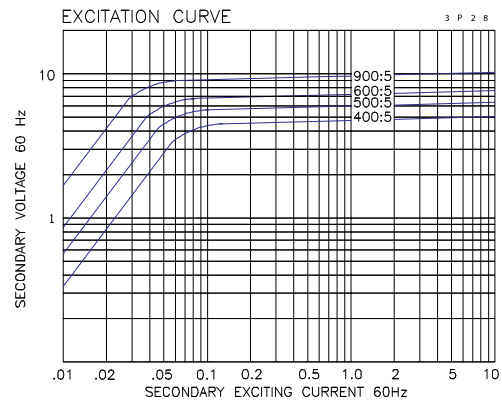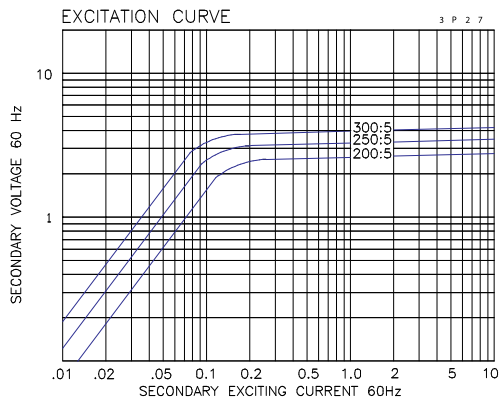

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_3P327-1535-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

