

GE

Energy Connections

Model 3P40

Current Transformer Window Diameter 1.75"

Application

3 phase relay, metering and motor overload protection.

Frequency


50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Approximate weight 14 lbs.

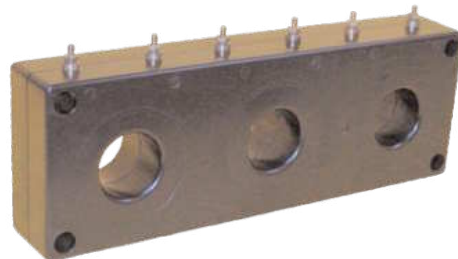



REGULATORY AGENCY APPROVALS
 E93779  LR89403
 Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by U.L. in accordance with IEC 44-1

Data Table: Model 3P40

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Secondary Winding Resistance (Ω @ 75 °C)
			B0.1	B0.2	B0.5	B0.9	B1.8	
3P40-101	100:5	—	0.6	1.2	2.4	—	—	0.033
3P40-151	150:5	—	0.6	0.6	1.2	2.4	—	0.049
3P40-201	200:5	C10	0.3	0.6	0.6	1.2	2.4	0.082
3P40-251	250:5	C10	0.3	0.3	0.6	0.6	1.2	0.103
3P40-301	300:5	C20	0.3	0.3	0.3	0.6	1.2	0.124
3P40-401	400:5	C20	0.3	0.3	0.3	0.6	1.2	0.131
3P40-501	500:5	C20	0.3	0.3	0.3	0.3	0.6	0.163



Model 3P40

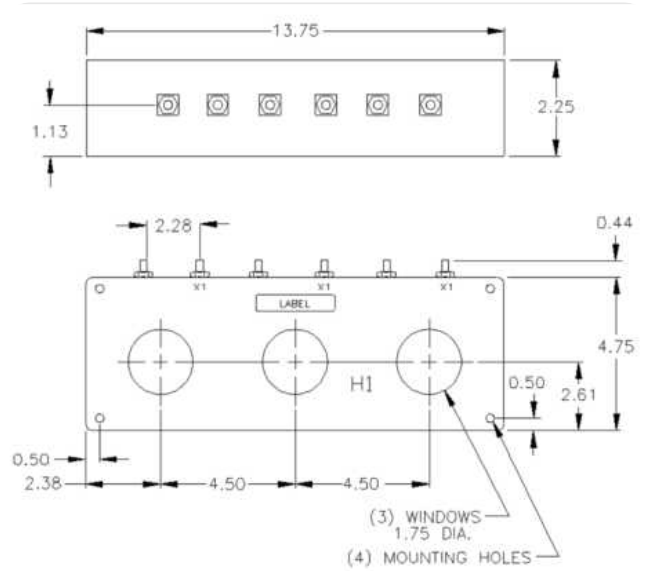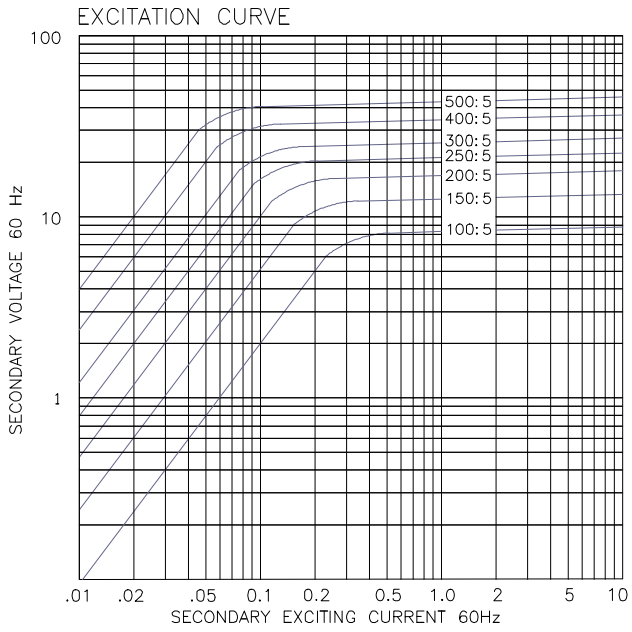

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_3P40-1192-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

