

Model 561

Current Transformer Window Size 3.25" x 4.25"

Application

Relaying and metering.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Insulation System

Temperature Class H (180 °C).

Continuous Thermal Current Rating Factor

1.33 at 30 °C. amb., 1.0 at 55 °C. amb.

Terminals are brass studs No. 10-32 with one flatwasher, lockwasher and regular nut.

Approximate weight 8 lbs.



REGULATORY AGENCY APPROVALS



 E93779  LR89403
Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Model 561

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Secondary Winding Resistance (Ω @ 75 °C)
			B0.1	B0.2	B0.5	B0.9	B1.8	
561-101	100:5	—	2.4	2.4	—	—	—	0.021
561-151	150:5	C10	1.2	2.4	—	—	—	0.032
561-201	200:5	C10	0.6	1.2	2.4	2.4	—	0.043
561-251	250:5	C20	0.6	0.6	1.2	2.4	—	0.054
561-301	300:5	C20	0.3	0.6	1.2	1.2	2.4	0.064
561-401	400:5	C20	0.3	0.3	0.6	1.2	1.2	0.086
561-501	500:5	C20	0.3	0.3	0.3	0.6	0.6	0.170
561-601	600:5	C20	0.3	0.3	0.3	0.3	0.6	0.161
561-751	750:5	C50	0.3	0.3	0.3	0.3	0.6	0.202
561-801	800:5	C50	0.3	0.3	0.3	0.3	0.6	0.340
561-102	1,000:5	C50	0.3	0.3	0.3	0.3	0.3	0.425
561-122	1,200:5	C100	0.3	0.3	0.3	0.3	0.3	0.510
561-152	1,500:5	C50	0.3	0.3	0.3	0.3	0.3	0.766
561-162	1,600:5	C50	0.3	0.3	0.3	0.3	0.3	0.817
561-202	2,000:5	C100	0.3	0.3	0.3	0.3	0.3	1.021
561-252	2,500:5	C100	0.3	0.3	0.3	0.3	0.3	1.276
561-302	3,000:5	C50	0.3	0.3	0.3	0.3	0.3	1.396
561-322	3,200:5	C50	0.3	0.3	0.3	0.3	0.3	1.489
561-402	4,000:5	C100	0.3	0.3	0.3	0.3	0.3	1.861



Model 561

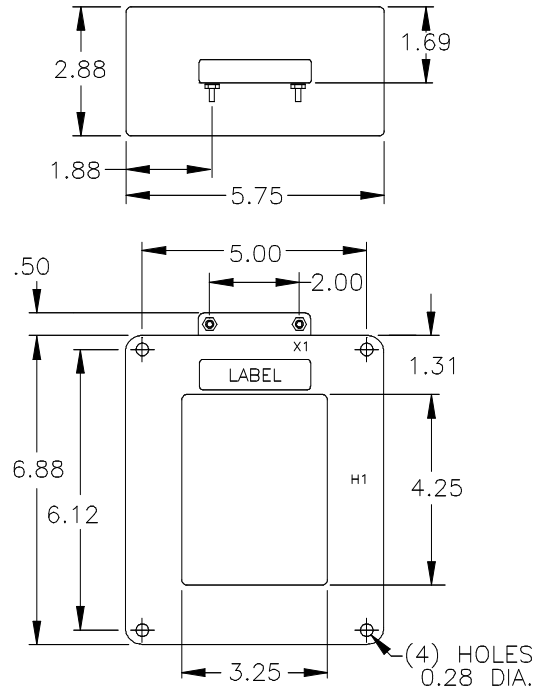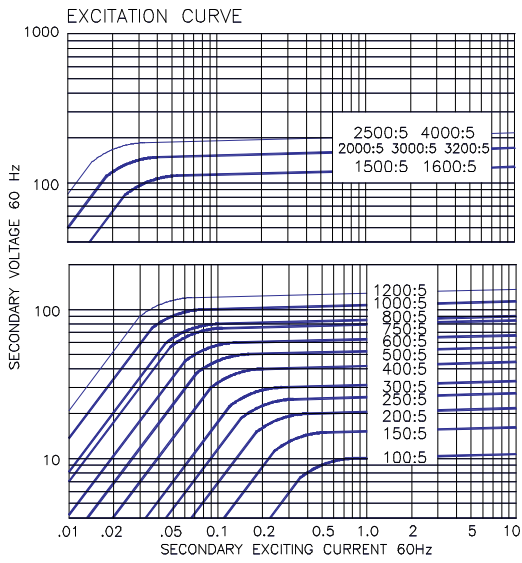

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_561-1322-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

