

# Model 3P22

## Current Transformer Window Diameter 0.44"

### Application

Instrumentation & Metering. Idea for 3-phase motor loads.

### Frequency

60 Hz.

### Feature

CT can be mounted directly to cable with nylon thumb screws

### Insulation Level

10 kV BIL, 600 Vac

Leads are No. 16 AWG, 24" long

Approximate weight 0.6 lbs

### Data Table Model 3P22

Catalog Number	Current Ratio	Accuracy (60 Hz.)	Rating Factor
3P22-500-1.0	50:1.0	2%, 0.1VA	1.0
3P22-101-1.0	100:1.0	2%, 0.1VA	1.0


\* Consult factory for additional ratios.



For Horizontal Mounting



Model 3P22

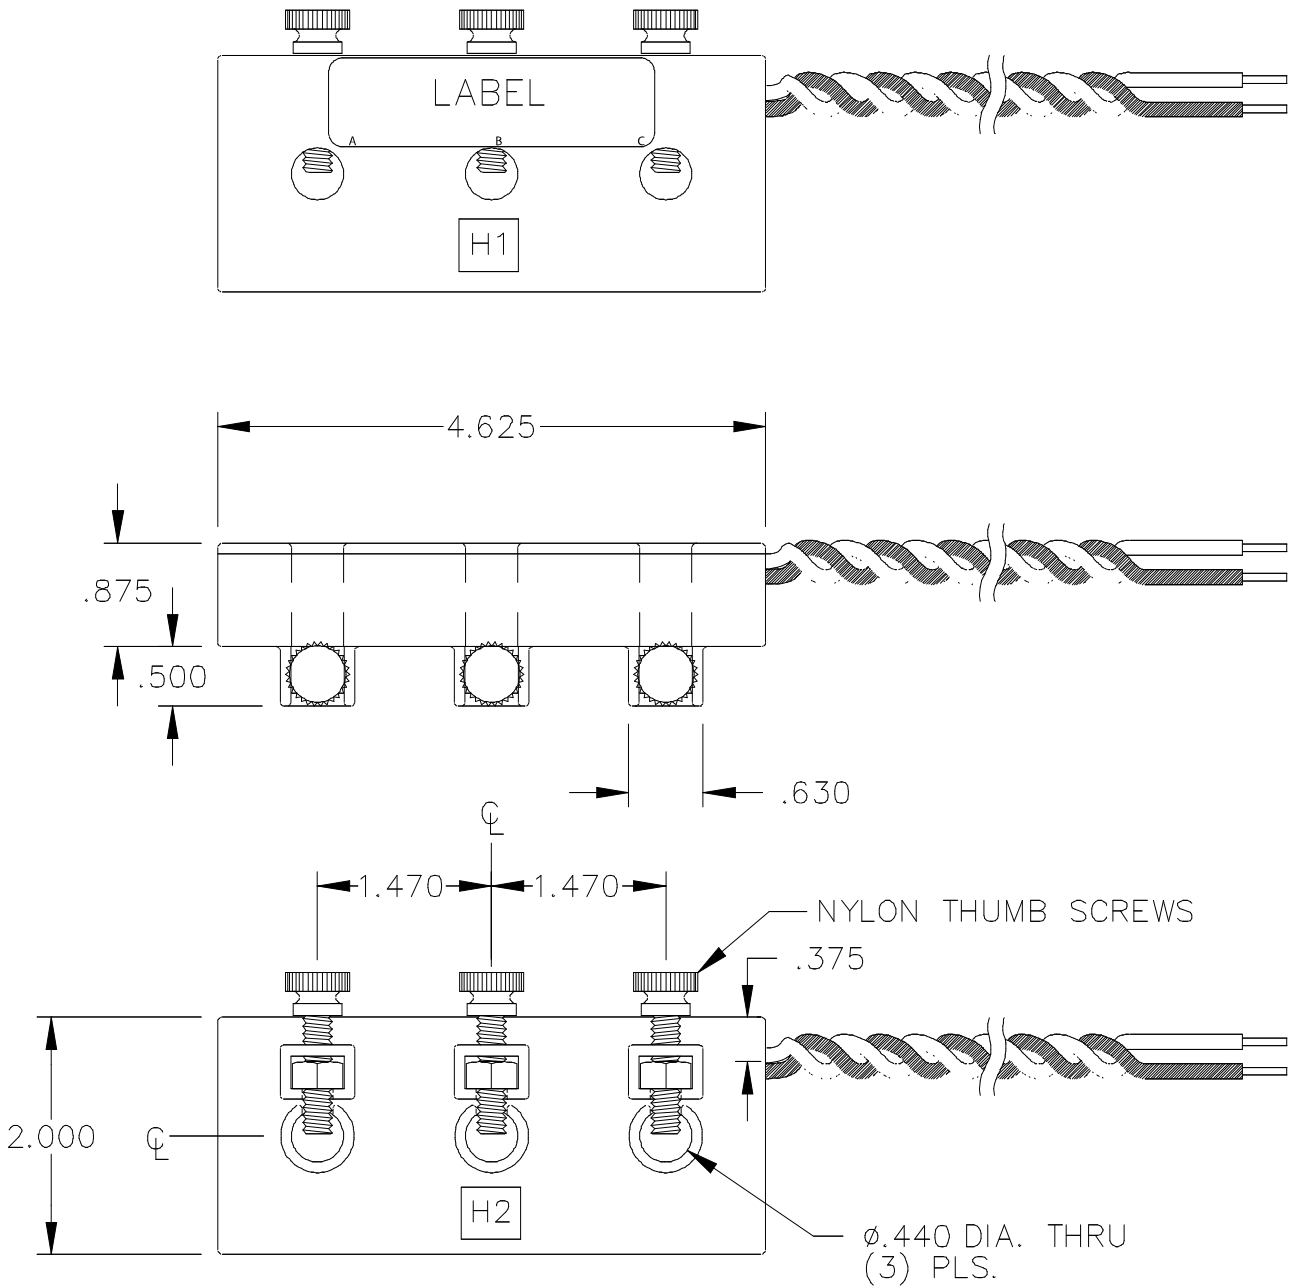

[GEGridSolutions.com](http://GEGridSolutions.com)

ITI-Model-3P22-Spec-EN-2020-09-Grid-AIS-1533. © Copyright 2020. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

**Worldwide Contact Center**

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

