

# Model JAB-AC

**Indoor Current Transformer 600 V, 10 kV BIL, 200-3,000 A  
Window Size 4.50" X 3.50**

## Application

Designed for both indoor and outdoor service; especially designed for installation over the secondary bushings of pad mounted transformers from 75 kVA to 3,000 kVA. For mounting and application information, including use at higher voltages, and matching the current rating to the pad transformer thermal capability, please refer to the Applications Information section of catalog GEP-9186.

## Weight

Approximately .....8.25 lbs

## Reference Drawings

Outline .....0121C33851

## Insulation Level

0.6 kV; BIL 10 kV full wave

## Frequency

50-60 Hz



## JAB-AC Data Table


Current Ratio (Amps) Pri : Sec	ANSI Accuracy Class, 60 Hz Burden Per ANSI					Continuous Thermal Current Rating Factor $\Psi$		Catalog Number (With Secondary Hardware and Cover)
	B0.1	B0.2	B0.5	E0.04	E0.2	@ 30 °C Amb.	@ 55 °C Amb.	
800:5	0.15	0.15	0.3	--	--	3.0	2.2	750X136412
1,000:5	0.15	0.15	0.3	0.15	--	2.0	1.5	750X136413
1,200:5	0.15	0.15	0.3	0.15	--	1.5	1.1	750X136414
1,500:5	0.15	0.15	0.3	0.15	0.15	2.0	1.5	750X136415
2,000:5	0.15	0.15	0.15	0.15	0.15	1.0	0.7	750X136416
3,000:5	0.15	0.15	0.15	0.15	0.15	1.0	0.7	750X136417

Notes:

$\Psi$  A high temperature version is available for use in locations with unusually high ambient temperatures.  
Consult factory for base plate provisions.



## JAB-AC Dimensions

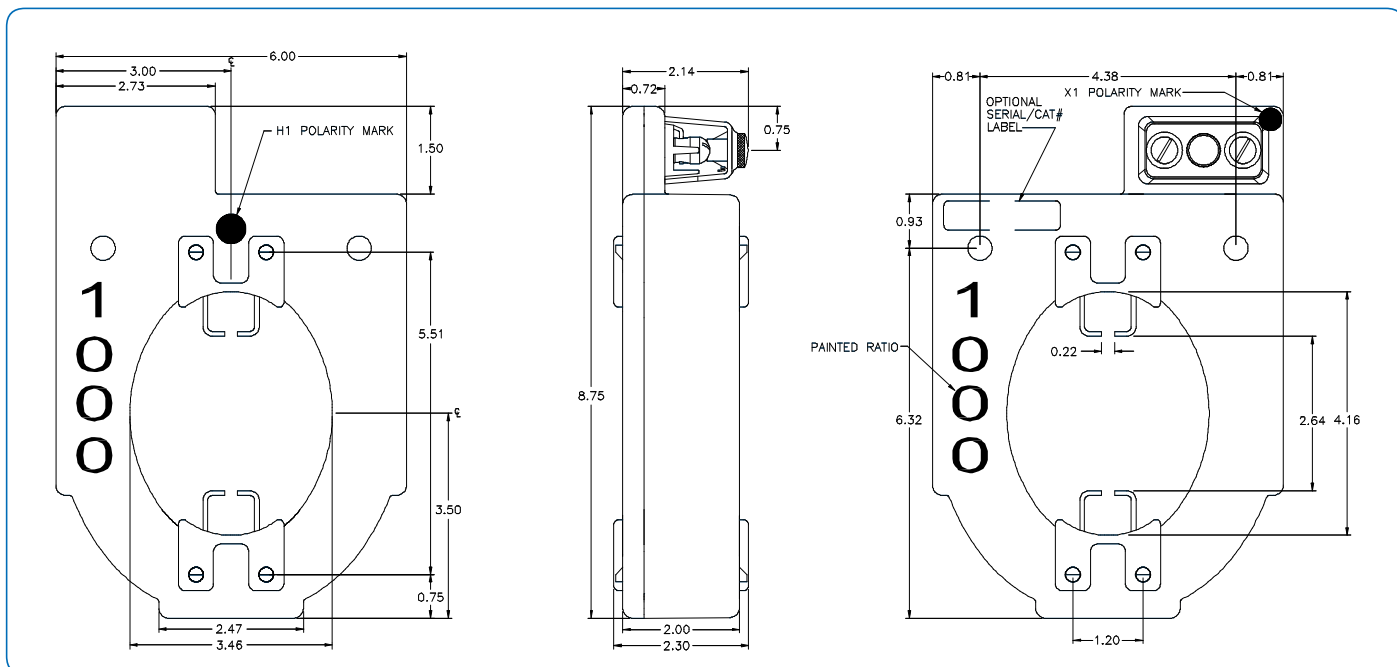

### Construction and Insulation

The core and coil assembly is encapsulated in resin within a molded case. The case is molded with GE Valox thermoplastic polyester resin. This tough material has excellent electrical and mechanical properties over a wide temperature range, has low water absorption and is resistant to oil and a variety of chemicals. The polyurethane resin filling completely encapsulates the winding, leads and terminals to form a waterproof unit.

### Core and Coils

The core is made from high quality grain oriented silicon steel, annealed under rigidly controlled factory conditions. The secondary winding is made of heavy enameled copper wire. The secondary windings are evenly distributed around the core for maximum accuracy and resistance to stray fields from adjacent conductors.

### Terminals

Secondary terminals are tin plated brass, compression type with a 0.275" diameter cross-hole for wiring and a 1/4-28 clamp screw. A shorting device is provided and interlocked to the terminal cover. The terminal cover is made of a clear plastic. Provision is made for sealing the cover.

### Polarity

Primary and secondary marks H1, H2 and X1, X2 are molded into the case. In addition, H1 and X1 are identified by white dots.

### Primary Conductor

These transformers are primarily intended for installation over the bushing and terminal blade of pad mount transformers, which then forms the primary conductor.

### Nameplates

The nameplate is laser engraved aluminum. It is attached to the side of the unit and has provision for attaching the user's identifying tag. The nominal current rating is on both faces of the unit in large numerals.

### Mounting

The transformer can be mounted in any position but is usually installed on the pad mount transformer terminal blade using the "grabbers". The transformer also has two mounting holes allowing it to be attached to a mounting bracket.

### Maintenance

These transformers require no maintenance, other than occasional cleaning, if installed where air contamination is severe.

### GEGridSolutions.com

ITI\_Model\_JAB\_AC-Spec-EN-2019-04-Grid-AIS-1380. © Copyright 2019. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

### Worldwide Contact Center

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

